# MASTER CLOSURE®

## A SUPERIOR METAL PANEL & METAL ROOF CLOSURE SYSTEM

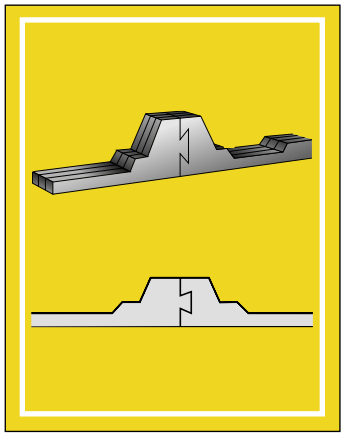

- Master Closure is a non shrinking crosslink polyethylene foam, 2 lb. density, charcoal gray in color.
- This material virtually eliminates moisture absorption and transmission.
- Fast, easy and economical to install in lengths to fit your profile.
- Available with or without glue bead for easy installation.
- Most configurations have interlocking dove tail joints.
- Most metal profiles are available and in stock.
- Configurations for outside and inside metal profiles.
- Provides complete snow, rain and insect barrier.
- No special tools required - simply peel and stick.
- Very light weight product that is easily handled and installed.
- Does not promote combustion.

## TECHNICAL DATA

### MASTER CLOSURE PHYSICAL SPECIFICATIONS

| | | | |
|---|---|---|---|
| Density | 2 pcf - no shrinkage | Tensile strength | 43psi |
| Elongation | 120% (% to break) | Tear resistance | 11 - lbs/in$^2$ |
| Compression set | 28% (% original thickness) | Shore hardness (A) | 7 |
| Water absorption (Does not absorb water) | 0.04 - lb/sq ft | Working temperature | -70$^0$F to +175$^0$F |

# MASTER RIDGE VENT®

## THE ROLLED ROOF RIDGE EXHAUST VENTING SYSTEM FOR RESIDENTIAL, COMMERCIAL & POST FRAME METAL ROOFS

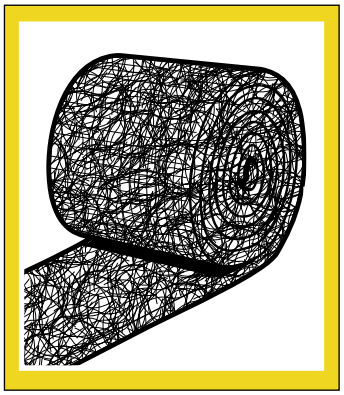

- Available in 8” x 20 foot or 11.5” inch X 20 foot rolls.
- No special tools required - simply fasten with nails included.
- Joints are square cut for excellent fit.
- Net free area of air exhaust is 22 square inches per linear foot.
- Conforms to any roof pitch from 2/12 to 20/12.
- Provides excellent snow, rain and insect barrier.
- Invisible ridge ventilation from ground level.
- Use your standard metal or fiberglass ridge cap.
- Use 2”, 2-1/2” or 3” Master Grippers to install all ridge caps.
- Does not promote combustion.

## TECHNICAL DATA

### MASTER RIDGE VENT PHYSICAL SPECIFICATIONS

| | |
|---|---|
| Water absorption | Does not absorb water |
| Cold cracking resistance | Tested at -20$^0$F - exposure period - 6 hours<br>No breakage of fibers |
| Working temperature range | -40$^0$F to 180$^0$F |
| Self ignition temperature | 970$^0$F |
| Dust flow rate | 46 gm./min. @ 15 M.P.H. wind speed |