




MASTER DRILLERS™

METAL PANEL TO METAL GIRT OR PURLIN,
STITCHING AND STRUCTURAL APPLICATIONS

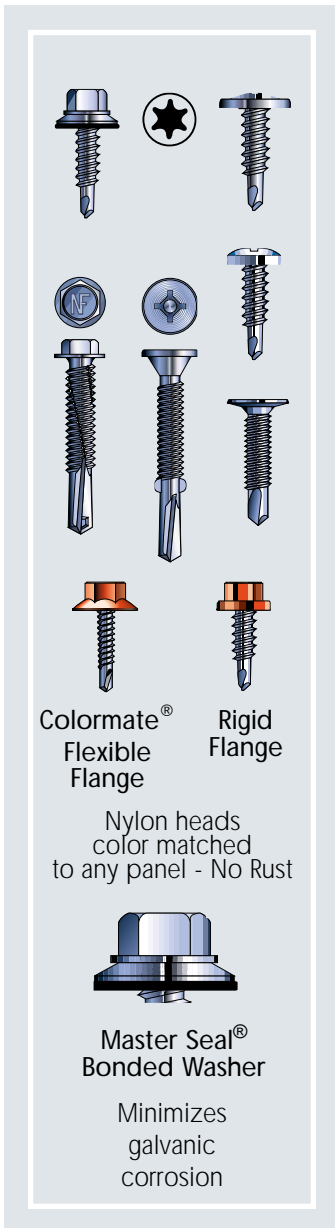


- Master Drillers are available in nine head styles.
- Available in # 6 to # 18 diameter & in lengths from 3/8" to 8". #14 lengths to 8". Drilling capacities to .500".
- **NEW PRODUCT:** Six Lobe Drive available on special order.
- Master Drillers with High Hex Washer heads are available with pilot points that prevent jacking when drilling multiple sheets.
- Master Seal Washers are one piece, galvanized steel, aluminum or stainless steel vulcanized to an EPDM sealing washer - no leaks.
- Drillers are available in Case Hardened Steel & 410 Case Hardened Stainless Steel.
- Structural drillers 12-24 x 7/8" drill up to 3/8" steel, 1-1/4", 1-1/2", 2" - drill up to 1/2" steel.
- **NEW PRODUCT:** Structural Drillers in 1/4 - 28 HWH / 5 Point, 3" to 8".
- Flange Head design provides maximum pullover resistance. Available # 12 x 1-1/4", 1-1/2" - 14 x 7/8" stitch, 14 x 1-1/2" and 3".
- Structural drillers are available DT1500 coated for increased corrosion resistance.
- **Applications:**
 - Panel over insulation to steel frame
 - HVAC assembly
 - Stitching roof, wall, decking or fascia panels
 - Metal decking
 - Liner panels
 - Wood fascia to steel
 - Z bar to structure



Master Drillers are available in special long lengths to 8"

HEAD TYPES

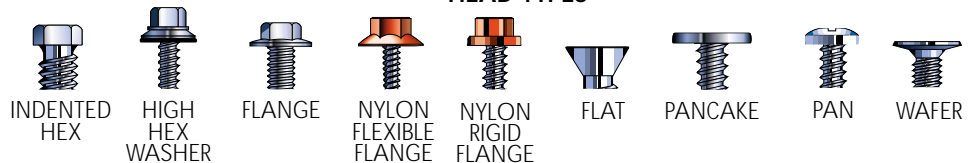

Structural drillers are made with type 4.5 or type 5 drill points

Anti-corrosion finishes available for Master Drillers

Standard Coating

JS500
PLATING
SYSTEM

Withstands 500 Hours Salt Spray test and 5 cycles in Kesternich (1 litre SO₂ per cycle) testing
No Red Rust

Longlife Coating

DT2000
LONGLIFE
COATING

Withstands 2000 Hours Salt Spray test and 35 cycles in Kesternich (1 litre SO₂ per cycle) testing
No Red Rust

410 HT Stainless

JS600 Plated
JS600
PLATING
SYSTEM

High lubricity anti-corrosion protection for stainless steel
No Red Rust

Powder Coated

POWDER
COATED
TOUGH™

Exceeds 50 cycles in Kesternich (2 litre SO₂ per cycle) testing 3000 hrs. salt spray
No Red Rust

Longlife Coating

DT1500
LONGLIFE
COATING

Withstands 1500 Hours Salt Spray test and 13 cycles in Kesternich (1 litre SO₂ per cycle) testing
No Red Rust

For detailed information on finishes see plating & coating section

Master Seal is a registered trademark of Aztec Washer Company, Inc.